


# RCS-RB7535-100-GD

ROBO Cylinder Rod Type: Unit Width 75mm  
100W, Short Shape w/ Double Guide

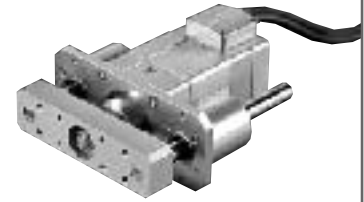

Type Rod (75mm wide) w/ double guides Stroke 50~300mm Load capacity 40kg (horizontal)/17.9kg (vertical)

Model specification items Series Type Encoder type Motor Guide type Speed type Stroke Cable length Options  
(Example) RCS -RB7535- I - 100 - GD - H - 300 - S - B

\* Refer to page 37 for the details of model specification items.

## Model/Specifications

Model	Encoder type	Motor (W)	Lead (mm)	Stroke 50mm increments (mm)	Speed (mm/s)	Load capacity (Note 1)		Rated thrust (N)
						Horizontal (kg)	Vertical (kg)	
RCS-RB7535-I-100-GD-H***-△-□	Incremental	100	16	50~300	1~800	10	1.9	105.8
RCS-RB7535-I-100-GD-M***-△-□			8		1~400	22	7.4	212.7
RCS-RB7535-I-100-GD-L-***-△-□			4		1~200	40	17.9	424.3

\* In the above model names, \*\*\* the stroke, △ the cable length, and □ the applicable options.

## Options


Name	Model	Page
Different connector-cable outlet direction	A1~A3	→P137
Brake	B	→P137
With foot bracket	FT	→P139

## Common Specifications

Drive system	Ball screw $\phi$ 12mm, rolled C10
Positioning repeatability	$\pm$ 0.02mm
Backlash	0.05mm or less
Guide	Ball bush guide x 2 (externally attached)
Rod diameter	$\phi$ 35mm
Rod non-rotational accuracy	$\pm$ 0.08°
Base	Material: Aluminum with white alumite treatment
Cable length (Note 2)	P: 1m, S: 3m, M: 5m, X□□: Length specification, R□□: Robot cable

## Dimensions

\* Please note that due to its structure, the rod type is not available in the reversed-home specification.

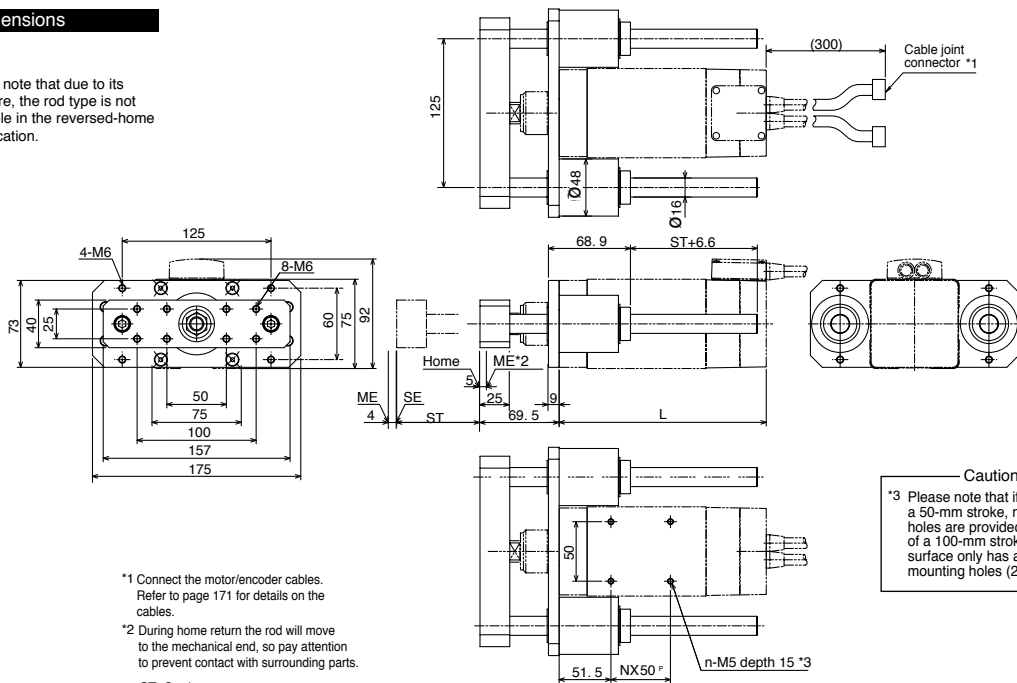

\*1 Connect the motor/encoder cables. Refer to page 171 for details on the cables.

\*2 During home return the rod will move to the mechanical end, so pay attention to prevent contact with surrounding parts.

ST: Stroke  
SE: Stroke end  
ME: Mechanical end

**Caution**  
\*3 Please note that if you choose a 50-mm stroke, no mounting holes are provided. In the case of a 100-mm stroke, the bottom surface only has a single row of mounting holes (2 holes).

## Dimensions and Weight by Stroke

Stroke	50	100	150	200	250	300
L	133	183	233	283	366	383
N	-	-	1	2	3	4
n	-	2	4	6	8	10
Weight (kg)	4.4	5.1	5.7	6.3	6.9	7.5

## Applicable Controller Specifications

Applicable Controller	Maximum number of controlled axes	Compatible encoder type	Program operation	Positioner operation	Pulse-train control	Power supply voltage	Page
RCS-C	1 axis	Incremental	X	O	X	AC100/200V	→P163
E-Con	1 axis	Incremental	X	O	X	AC100/200V	Refer to the separate catalog.
P-Driver	1 axis	Incremental	X	X	O	AC100/200V	
X-SEL	4 axes	Incremental	O	△	X	AC100/200V	



(Note 1) The load capacity is based on operation at an acceleration of 0.25 G for the H type, 0.17 G for the M type and 0.1 G for the L type (each represents the maximum acceleration for the applicable type). If no guide is used, refer to the correlation diagrams of allowable tip load and traveling life on page 132.  
(Note 3) The maximum cable length is 15 m. Specify the desired length in meters (e.g., X08 = 8 m).

\* Refer to page 23 for other points to note.