


RCS-RB7535-100-GN

ROBO Cylinder Rod Type: Unit Width 75mm
100W, Short Shape w/o Guide

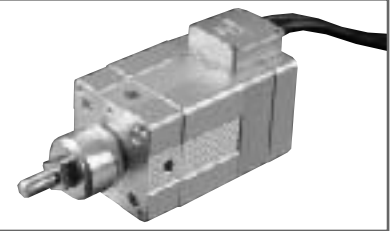

Type Rod (75mm wide) w/o guides Stroke 50~300mm Load capacity 40kg (horizontal)/19.5kg (vertical)

Model specification items Series Type Encoder type Motor Guide type Speed type Stroke Cable length Options
(Example) RCS -RB7535- I - 100 - GN - H - 300 - S - B

* Refer to page 37 for the details of model specification items.

Model/Specifications

Model	Encoder type	Motor (W)	Lead (mm)	Stroke 50mm increments (mm)	Speed (mm/s)	Load capacity (Note 1)		Rated thrust (N)
						Horizontal (kg)	Vertical (kg)	
RCS-RB7535-I-100-GN-H-***-△-□	Incremental	100	16	50~300	1~800	10	3.5	105.8
RCS-RB7535-I-100-GN-M-***-△-□			8		1~400	22	9	212.7
RCS-RB7535-I-100-GN-L-***-△-□			4		1~200	40	19.5	424.3

* In the above model names, *** the stroke, △ the cable length, and □ the applicable options.

Options


Name	Model	Page
Different connector-cable outlet direction	A1~A3	→P137
Brake	B	→P137
With flange	FL	→P139
With foot bracket	FT	→P139

Common Specifications

Drive system	Ball screw ϕ 12mm, rolled C10
Positioning repeatability	\pm 0.02mm
Backlash	0.05mm or less
Guide	No guide
Rod diameter	ϕ 35mm
Rod non-rotational accuracy	\pm 0.7°
Base	Material: Aluminum with white alumite treatment
Cable length (Note 2)	P: 1m, S: 3m, M: 5m, X□□: Length specification, R□□: Robot cable

Dimensions

* Please note that due to its structure, the rod type is not available in the reversed-home specification.

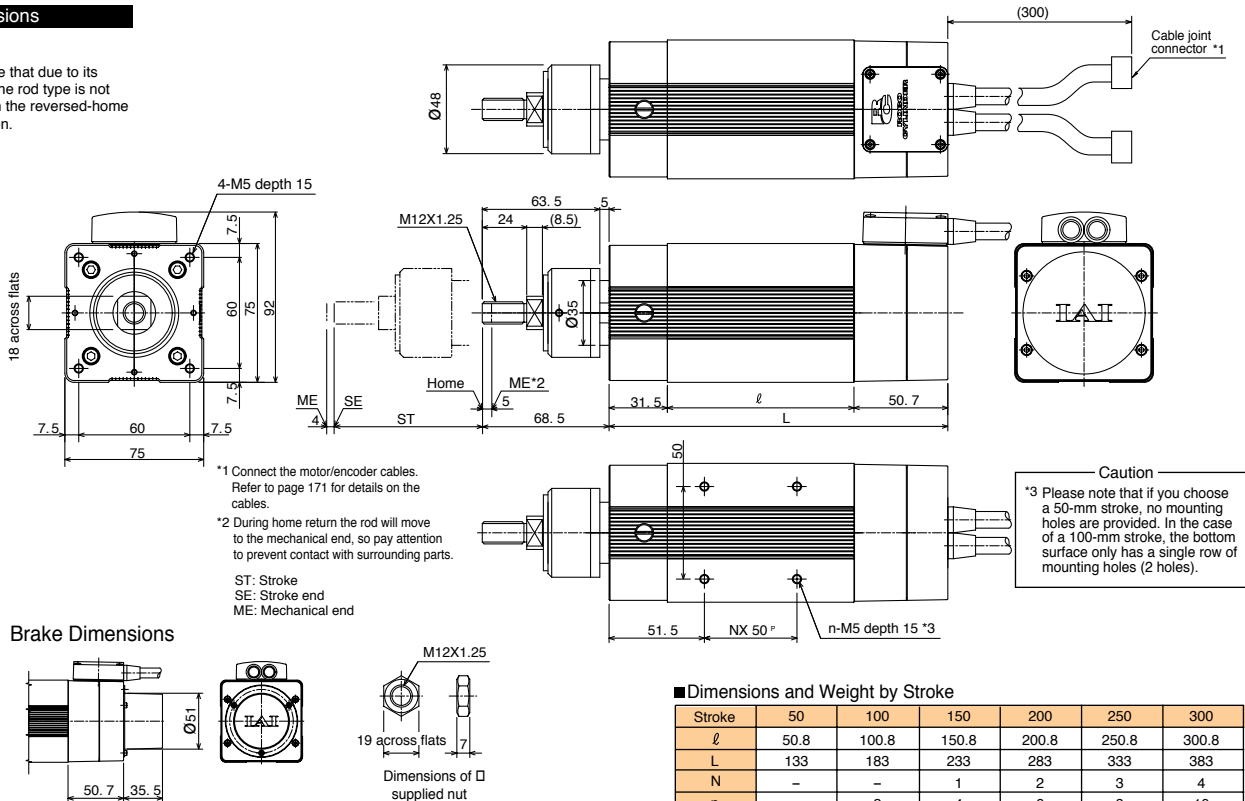


*1 Connect the motor/encoder cables. Refer to page 171 for details on the cables.
*2 During home return the rod will move to the mechanical end, so pay attention to prevent contact with surrounding parts.

ST: Stroke
SE: Stroke end
ME: Mechanical end

Caution
*3 Please note that if you choose a 50-mm stroke, no mounting holes are provided. In the case of a 100-mm stroke, the bottom surface only has a single row of mounting holes (2 holes).

Brake Dimensions

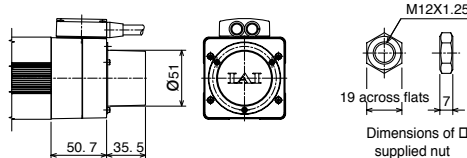

Applicable Controller Specifications

Applicable Controller	Maximum number of controlled axes	Compatible encoder type	Program operation	Positioner operation	Pulse-train control	Power supply voltage	Page
RCS-C	1 axis	Incremental	X	O	X	AC100/200V	→P163
E-Con	1 axis	Incremental	X	O	X	AC100/200V	Refer to the separate catalog.
P-Driver	1 axis	Incremental	X	X	O	AC100/200V	
X-SEL	4 axes	Incremental	O	△	X	AC100/200V	



(Note 1) The load capacity is based on operation at an acceleration of 0.25 G for the H type, 0.17 G for the M type and 0.1 G for the L type (each represents the maximum acceleration for the applicable type). The horizontal load capacity assumes a condition where a guide or guides are used to prevent the rod from receiving radial loads.
(Note 2) The maximum cable length is 15 m. Specify the desired length in meters (e.g., X08 = 8 m).

* Refer to page 23 for other points to note.